

# File specifications

## InFrame banners (banner with rubber tendon)



2 mm bleed

### InFrame banners:

Files are made in 10 % of original size.  
Files should have 2 mm bleed to all sides.


### Example\*:

Frame size: 3000 x 2500 mm

### Print file (10%):

Size: 300 x 250 mm - Size including bleed: 304 x 254 mm

*\*This is just an example. Actual measurements for your project is provided separatly.*

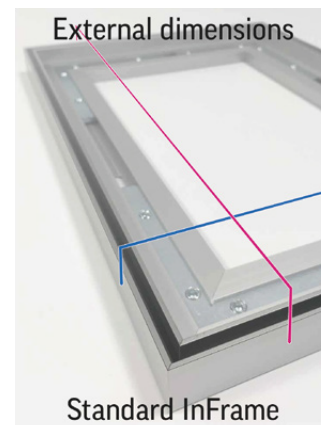

2 mm bleed

When using Pantone colors, use Pantone Solid Coated (example: PMS 485 C).

All fonts and curves should be vector.

### Image resolution:

- Viewing distance 0,5m to 5m: >150 dpi in full size. (100%)
- Viewing distance 5m to 10m: >100 dpi in full size. (100%)
- Viewing distance 10m to 50m: >50 dpi in full size. (100%)

Use ICC profile: Coated FOGRA39

Filename should be stored in logical manner, and should contain company / Expo name + measurements.  
(example: FirmaAS\_D01-03\_3000x2500mm.pdf)

Pdf files to be exported without compression.

2 mm bleed

2 mm bleed

It is important that these specifications are followed carefully! Deviations will result in extra file work before printing.  
This can lead to delayed delivery and additional costs for customer.